



产品说明书

Product specification


型号说明 Model description:

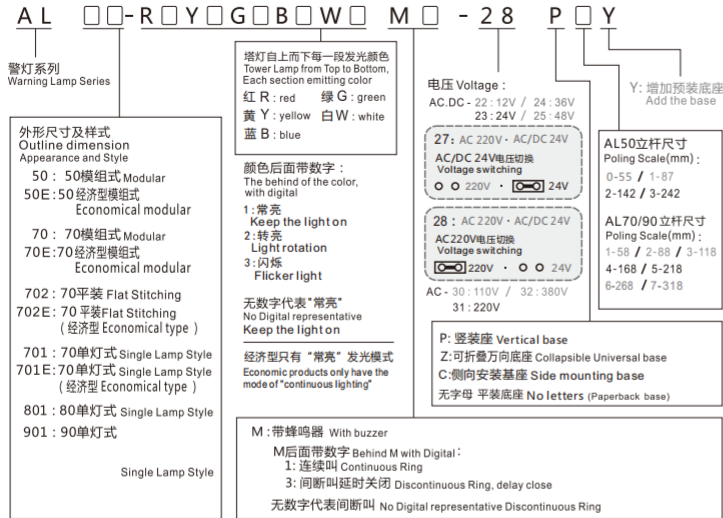

安装方式 Installation method :

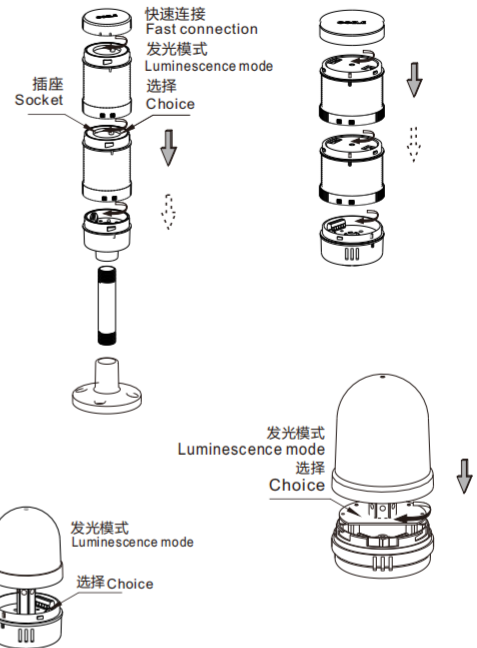

接线方式 Connection mode :

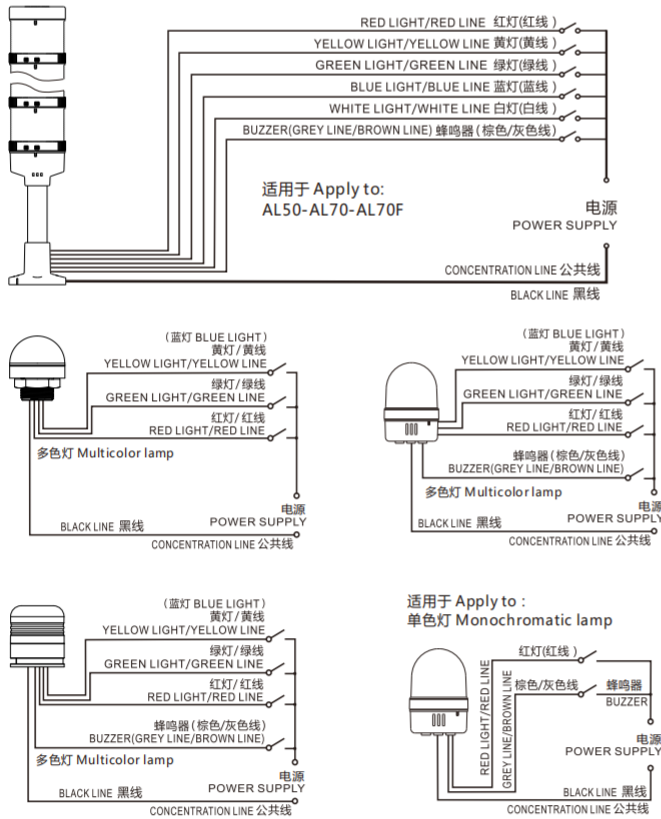

发光模式 Luminescence mode

转亮
Light rotation
○ ○ ○ ○

爆闪
Fast flashing
○ ○ ○ ○

常亮
Keep the light on
○ ○ ○ ○

闪亮
Flicker light
○ ○ ○ ○

电压切换 Voltage switching

红色跳线帽
Red jumper cap



AC/DC 24V电压切换
Voltage switching

○ ○ 220V · ○ ○ 24V


AC220V电压切换
Voltage switching

○ ○ 220V · ○ ○ 24V


尺寸 Sizes :

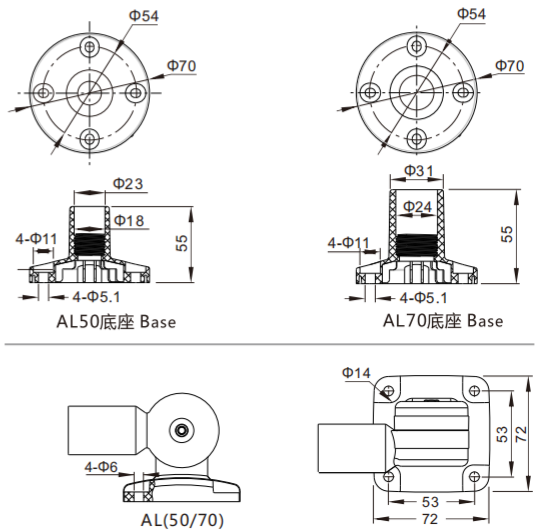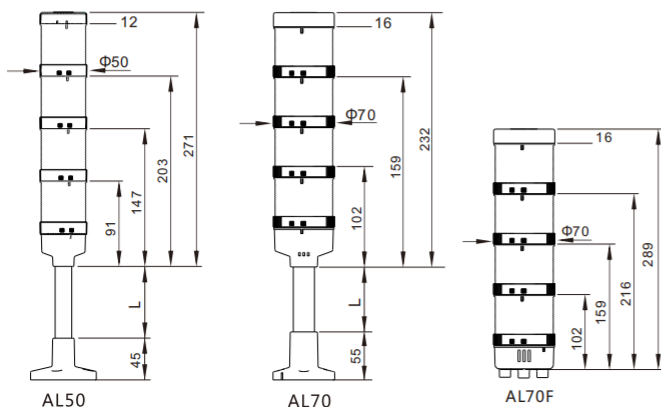

A尺寸 Sizes :

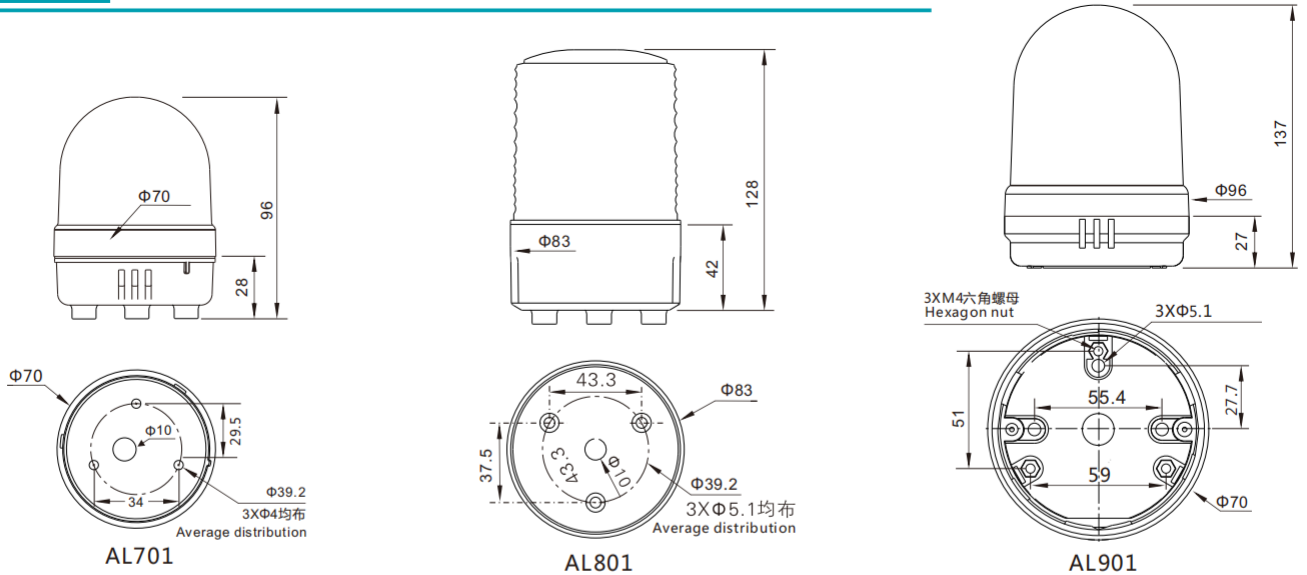

B尺寸 Sizes :

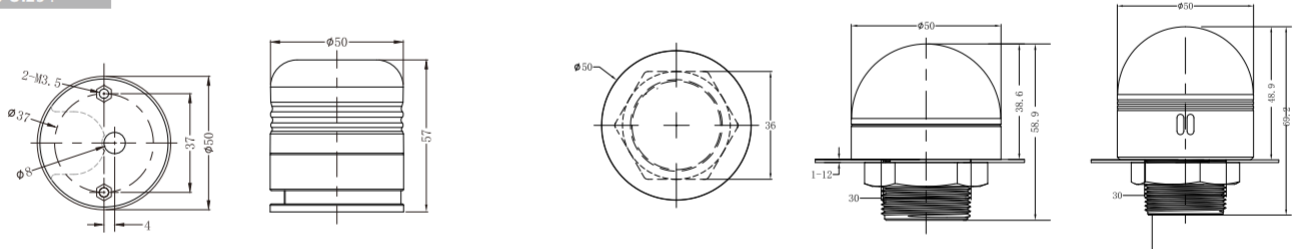

功能说明 Functional description:


- H1 (M1/H) -- 蜂鸣器延时功能选择 :**
Time delay function selection of buzzer
1-2 (开路open circuit)
无延时关闭No delay closing
1-2 (短接Short circuit)
延时关闭Delay off, 时间90秒 time 90 seconds
- H2 (M2/M) -- 蜂鸣器发声模式选择**
The selection of the sound mode of the buzzer
- H3/F -- 发光模式选择**
Selection of luminescent mode

- H4/S -- 多色功能切换 :**
Polychromatic function switching
多色演示Polychromatic demonstration:
1-2 (短接Short circuit)
2-3 (开路open circuit)
切换蓝色 Switch blue:
1-2 (开路open circuit)
2-3 (短接Short circuit)
切换黄色 Switch yellow:
1-2 (开路open circuit)
2-3 (开路open circuit)

- H5/R -- 红色优先选择 Red priority selection :**
1-2 (短接Short circuit)
多颜色同时发光, 只显示红灯
Many colors are shining at the same time, showing only red
1-2 (开路open circuit)
功能关闭 Functional closure

- J (J1) -- 电源输入接口 Power input interface :**
C: 公共端 Public end
L: 灯电源 Lamp power
R: 红灯电源 Red light power supply
G: 绿灯电源 Green light power supply
Y: 黄灯电源 Yellow light power supply
B: 蓝灯电源 Blue light power supply
M: 蜂鸣器电源 Buzzer power

转亮 Light rotation
爆闪 Fast flashing
常亮 Keep the light on
闪亮 Flicker light

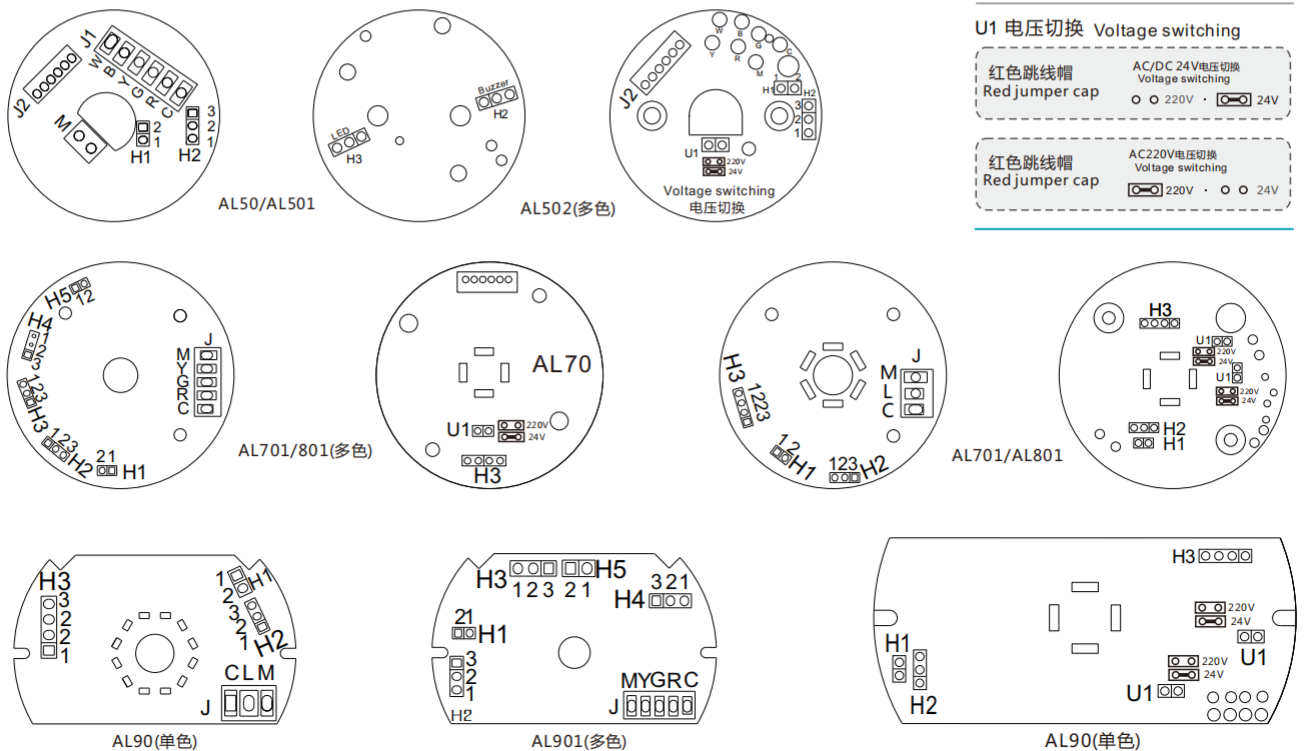

U1 电压切换 Voltage switching

- 红色跳线帽 Red jumper cap
- AC/DC 24V电压切换 Voltage switching
- AC 220V电压切换 Voltage switching